

# **3rd International Conference Advanced Mechanics: Structure, Materials, Tribology**

---

## **Analysis of Dynamic Absorber Efficiency in Random Vibrations of a Beam**

AIPCP25-CF-AMSMT2025-00060 | Article

PDF auto-generated using **ReView**



# Analysis of Dynamic Absorber Efficiency in Random Vibrations of a Beam

Olimjon Dusmatov<sup>1, a)</sup>, Muradjon Khodjabekov<sup>2, b)</sup>, Firuza Kasimova<sup>1, c)</sup>

<sup>1</sup>*Samarkand State University, Samarkand, Uzbekistan,*

<sup>2</sup>*Samarkand State University of Architecture and Civil Engineering named after Mirzo Ulugbek,*

<sup>a)</sup> Corresponding author: [dusmatov62@bk.ru](mailto:dusmatov62@bk.ru)

<sup>b)</sup> [uzedu@inbox.ru](mailto:uzedu@inbox.ru)

<sup>c)</sup> [firuza\\_kasimova1986\\_kasimova@mail.ru](mailto:firuza_kasimova1986_kasimova@mail.ru)

**Abstract.** In this work, the mean square values of displacements and base accelerations in the vibrations of a hysteresis-type elastic dissipative characteristic beam with variable cross-section in combination with a hysteresis-type elastic dissipative characteristic dynamic absorber under the influence of random excitations were determined analytically depending on the system parameters. The effectiveness of the dynamic absorber was evaluated based on the expressions of the mean square values of displacements and base accelerations. The change in the damping efficiency at different values of the parameters was investigated. In particular, the change in the mean square values of displacements and base accelerations around the resonance frequency with a change in the parameter characterizing the spectral width was analyzed and conclusions were drawn.

**Keywords:** beam, dynamic absorber, hysteresis, random vibration, mean square value.

## INTRODUCTION

In modern technology and equipment, the study of vibrations, taking into account the nonlinear dissipative characteristics of materials in machines, mechanisms, devices and their elements, and the determination of their dynamic characteristics as a result of stability and verification of their stability condition are considered urgent problems in terms of ensuring their long-term effective operation.

There are many scientific research works on mathematical modeling of vibrations of distributed parameter systems, taking into account their dissipative characteristics, and on checking the stability of their damping and harmful vibrations. In particular:

The work [1] considered transverse vibrations of a beam with a uniformly decreasing thickness starting from one end. The vibration velocity was analyzed. It was shown that the obtained differential equations have an exact solution. Based on these solutions, a new method for solving the beam equation when the thickness change is not parabolic is proposed, and conclusions are given.

The work [2] presented numerical methods for analyzing vibrations of beams with variable cross-section. The Ostrogradsky-Hamilton principle was used to obtain the equations of longitudinal, torsional and transverse vibrations of beams. The boundary value problems given by differential calculation methods under various boundary conditions were solved and analyzed.

The work [3] studied nonlinear free and forced vibrations of discrete and continuous systems. The systems are mathematically modeled using Lagrange equations, and solution methods are developed.

The work [4] theoretically studied nonlinear systems depending on the change in the stability parameters of motion. Theorems are presented for the separation of stable and unstable areas of system motion. The stability of motion of systems represented by non-homogeneous differential equations with periodic coefficients is analyzed.

The work [5] provides theoretical information on the harmonic balance method used to investigate the vibration of nonlinear systems. The nature of the nonlinear coefficients in the differential equation of motion of the system is analyzed. In addition, a method for determining the characteristic equation for systems with hysteresis-type elastic dissipative characteristics is shown and justified.

In the work [6], vibration forms of beams protected from vibrations were investigated by conducting experiments. The changes of the mode shapes with the change of frequencies are shown in the graphs, the conclusions about the effect of the frequencies on the mode shapes are drawn and the necessary recommendations are given.

In the work [7], the problems of determining the mode shapes, frequencies and optimal parameters of the joint vibrations of the second beam mounted on its free end as a dynamic absorber for a beam with one end free and the other end clamped were considered. In vibration damping, in addition to the ratio of the mass of the dynamic absorber to the mass of the beam, the damping efficiency is shown depending on the elastic properties of the beam installed as a dynamic absorber and its length. It was found that the flexibility properties and its length compared to the traditional dynamic absorber provided additional possibilities in the necessary design of this dynamic absorber.

In works [8-15], the theoretical foundations and applications of studying the dynamics and motion stability of nonlinear systems under the influence of various excitations are presented, and the issues of linearizing nonlinear characteristics are considered. The effectiveness of dynamic absorbers in various processes is evaluated.

Mathematical modeling of nonlinear mechanical systems, studying their dynamics, exploring the stability of their vibrations and reducing harmful vibrations at low and high frequencies were solved in the works [16-22]. The Stability behavior of the system was checked at different values of the parameters, conclusions were obtained as a result of numerical calculations.

The problem of determining the mean square values of nonlinear vibrations of a hysteresis-type elastic beam with a variable cross-section and a dynamic absorber under the influence of random excitations is one of the urgent problem.

## MATERIALS AND METHODS

In this work, the problem of determining the mean square values of nonlinear vibrations of a hysteresis-type elastic beam with a variable cross-section and a dynamic absorber under the influence of random excitations was considered and numerically analyzed.

The system of differential equations of motion in transverse random vibrations of a hysteresis-type elastic beam with a variable cross-section and a dynamic absorber is expressed as follows as a result of the method of expanding the system into a series by eigenforms [22]:

$$\begin{aligned}
 & \ddot{q}_i + \left\{ (1 + K_0(-\gamma_1 + j\gamma_2))p_i^2 + \frac{3E}{\rho F d_{2i}}(-\gamma_1 + j\gamma_2) \times \right. \\
 & \times \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^k(k+3)} \int_0^l I(x) u_i \frac{\partial^2}{\partial x^2} \left( \frac{\partial^2 u_i}{\partial x^2} \right)^k dx + \frac{E}{\rho F d_{2i}} \int_0^l \frac{\partial^2 I}{\partial x^2} u_i \frac{\partial^2 u_i}{\partial x^2} \times \\
 & \times \left. \left[ 1 + K_0(-\gamma_1 + j\gamma_2) + 3(-\gamma_1 + j\gamma_2) \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^k(k+3)} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right] dx + \right. \\
 & + \frac{2E}{\rho F d_{2i}} \int_0^l \frac{\partial I}{\partial x} u_i \frac{\partial}{\partial x} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k [1 + K_0(-\gamma_1 + j\gamma_2) + 3(-\gamma_1 + j\gamma_2) \times \\
 & \times \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^k(k+3)} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k] dx \} q_i - \mu \mu_0 u_{i0} n_0^2 (1 + (-\varphi_1 + j\varphi_2) \times \\
 & \times (H_0 + f(\sigma_{\zeta_{ot}}))) \zeta = -d_i \frac{\partial^2 w_0}{\partial t^2}; \quad (1) \\
 & u_{i0} \ddot{q}_i + \ddot{\zeta} + n_0^2 \left( 1 + (-\varphi_1 + j\varphi_2) (H_0 + f(\sigma_{\zeta_{ot}})) \right) \zeta = -\frac{\partial^2 w_0}{\partial t^2},
 \end{aligned}$$

where  $u = u(x)$ ;  $u_{i0} = u(x_0)$ ;  $n_0^2 = \frac{c}{m}$ ;  $\mu = \frac{m}{\rho F l}$ ;  $\mu_0 = \frac{l}{d_{2i}}$ ;  $d_i = \frac{d_{1i}}{d_{2i}}$ ;  $d_{1i} = \int_0^l u_i dx$ ;  $d_{2i} = \int_0^l u_i^2 dx$ ;  $\gamma_1, \gamma_2$  =  $\gamma_2 \text{sign} \omega$  coefficients determined from the nonlinear functional expressing the dissipative properties of the beam material;  $E$  is the modulus of elasticity;  $j = \sqrt{-1}$ ;  $\omega$  is frequency of vibrations;  $c, m$  are the stiffness and mass of the dynamic absorber, respectively;  $\rho, F$  are the density and cross-sectional area of the beam material, respectively;  $\delta(x)$  is the Dirac delta function;  $w_a$  is absolute displacement of the beam;  $\sigma_{ia}$  are absolute values of the mean square deviations of the beam;  $f(\sigma_{\zeta_{ot}})$  is decrement of vibrations,  $\sigma_{\zeta_{ot}}$  is a function of the mean square values of the relative

deformation,  $f(\zeta_{ot}) = H_1\sigma_{\zeta_{ot}} + H_2\sigma_{\zeta_{ot}}^2 + \dots + H_s\sigma_{\zeta_{ot}}^s$ ,  $H_0, H_1, \dots, H_s$  are parameters of the hysteresis node determined experimentally, depending on the damping properties of the dynamic absorber material;  $\varphi_1, \varphi_2$  are coefficients depending on the dissipative properties of the dynamic absorber material, determined from the hysteresis surface;  $K_0, K_1, \dots, K_r$  are experimentally determined parameters of the hysteresis node, which depend on the damping properties of the beam material;  $p_i$  are natural frequencies of the beam;  $I(x) = \frac{bh^3}{12}$  is moment of inertia;  $b = b(x)$ ,  $h$  and  $l$  are width, height and length of the beam, respectively;  $w$  is displacement of the base.

First, let's reduce the system of differential equations (1) to a system of algebraic equations using the differential operator  $S = \frac{d}{dt}$ . Introducing the substitution  $S = j\omega$  into the resulting system of algebraic equations, it is possible to determine the variables  $q_i$  ( $i = \overline{1, n}$ ) and  $\zeta$ :

$$\begin{aligned} q_i &= \frac{A_{10} + jB_{10}}{A_2 + jB_2} W_0; \\ \zeta &= \frac{A_{20} + jB_{20}}{A_2 + jB_2} W_0, \end{aligned} \quad (2)$$

where

$$\begin{aligned} A_{10} &= d_i\omega^2 - (d_i + \mu\mu_0 u_{i0})n_0^2 N_{01}; \quad B_{10} = -(d_i + \mu\mu_0 u_{i0})n_0^2 N_{02}; \\ N_{01} &= 1 - \varphi_1(H_0 + f(\zeta_{ot})); \quad N_{02} = \varphi_2(H_0 + f(\zeta_{ot})); \\ A_{20} &= -p_i^2 N_{11} - p_i^2 - (u_{i0} d_i - 1)\omega^2; \quad B_{20} = -p_i^2 N_{12}; \\ N_{11} &= -K_0\gamma_1 - \frac{3E}{\rho F d_{2i} p_i^2} \gamma_1 \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^{k(k+3)}} \int_0^l I(x) u_i \frac{\partial^2}{\partial x^2} \left( \frac{\partial^2 u_i}{\partial x^2} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right) dx + \\ &+ \frac{E}{\rho F d_{2i} p_i^2} \int_0^l \frac{\partial^2 I(x)}{\partial x^2} u_i \frac{\partial^2 u_i}{\partial x^2} \left[ 1 - K_0\gamma_{11} - 3\gamma_1 \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^{k(k+3)}} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right] dx + \frac{2E}{\rho F d_{2i} p_i^2} \times \\ &\times \int_0^l \frac{\partial I(x)}{\partial x} u_i \frac{\partial}{\partial x} \left[ \frac{\partial^2 u_i}{\partial x^2} \left[ 1 - K_0\gamma_1 - 3\gamma_1 \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^{k(k+3)}} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right] \right] dx; \\ N_{12} &= K_0\gamma_2 + \frac{3E}{\rho F d_{2i} p_i^2} \gamma_2 \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^{k(k+3)}} \int_0^l I(x) u_i \frac{\partial^2}{\partial x^2} \left( \frac{\partial^2 u_i}{\partial x^2} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right) dx + \\ &+ \frac{E}{\rho F d_{2i} p_i^2} \int_0^l \frac{\partial^2 I(x)}{\partial x^2} u_i \frac{\partial^2 u_i}{\partial x^2} \left[ 1 + K_0\gamma_2 + 3\gamma_2 \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^{k(k+3)}} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right] dx + \frac{2E}{\rho F d_{2i} p_i^2} \times \\ &\times \int_0^l \frac{\partial I(x)}{\partial x} u_i \frac{\partial}{\partial x} \left[ \frac{\partial^2 u_i}{\partial x^2} \left[ 1 + K_0\gamma_2 + 3\gamma_2 \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^{k(k+3)}} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right] \right] dx; \\ A_2 &= (p_i^2 - \omega^2 + p_i^2 N_{11})(n_0^2 N_{01} - \omega^2) - p_i^2 n_0^2 N_{12} N_{02} - u_{i0}^2 \mu\mu_0 \omega^2 n_0^2 N_{01}; \\ B_2 &= (p_i^2 - \omega^2 + p_i^2 N_{11})n_0^2 N_{02} + p_i^2 N_{12}(n_0^2 N_{01} - \omega^2) - u_{i0}^2 \mu\mu_0 \omega^2 n_0^2 N_{02}. \end{aligned}$$

Taking into account that the absolute acceleration of a hysteresis-type dissipative characteristic of a vibration-protected beam with variable cross-section consists of the sum of the relative acceleration and the base acceleration, and using expressions (2), we write the expression for the root mean square values of the absolute accelerations of the vibration-protected beam as follows:

$$\sigma_{W_0}^2 = \int_{-\infty}^{\infty} \left| 1 - u_i \omega^2 \frac{A_{10} + jB_{10}}{A_2 + jB_2} \right|^2 S_{W_0}(\omega) d\omega. \quad (3)$$

In order to calculate this integral expression, we obtain the following expression for the spectral density of the fundamental accelerations:

$$S_{W_0}(\omega) = \frac{D_{W_0} \alpha \omega_3^3}{\pi(\omega_3^2 - \omega^2 + j\alpha\omega_3\omega)(\omega_3^2 - \omega^2 - j\alpha\omega_3\omega)}, \quad (4)$$

where  $D_{W_0}$  is the dispersion of the fundamental acceleration;  $\omega_3$  is the frequency with the highest probability in the vibration spectrum;  $\alpha$  is a parameter characterizing the width of the vibration spectrum.

As a result, the integral (3) is expressed in the following form:

$$\sigma_{W_0}^2 = R_* \int_{-\infty}^{+\infty} \frac{Y_6(\omega)}{Z_6(i\omega)Z_6(-i\omega)} d\omega, \quad (5)$$

where

$$Y_6(\omega) = a_{35}\omega^{10} + a_{34}\omega^8 + a_{33}\omega^6 + a_{32}\omega^4 + a_{31}\omega^2 + a_{30};$$

$$\begin{aligned}
Z_6(i\omega) &= t_6(i\omega)^6 + t_5(i\omega)^5 + t_4(i\omega)^4 + t_3(i\omega)^3 + t_2(i\omega)^2 + t_1(i\omega)^1 + t_0; \\
a_{35} &= 0; a_{34} = (1 - d_i u_i)^2; \\
a_{33} &= 2(((\mu\mu_0 u_0 + d_i)u_i - u_0^2\mu\mu_0 + 1)N_{01}n_0^2 - p_i^2(N_{11} + 1))(1 - d_i u_i); \\
a_{32} &= (N_{01}^2 + N_{02}^2)(\mu\mu_0 u_0(u_0 - u_i) - d_i u_i + 1)^2 n_0^4 + \\
&+ 2(\mu\mu_0 u_0(u_0 - u_i)((N_{11} + 1)N_{01} + N_{12}N_{02}) - 2(N_{11} + 1)N_{01}(d_i u_i - 1))n_0^2 p_i^2 + ((N_{11} + 1)^2 + N_{12}^2)p_i^4; \\
a_{31} &= -2[(N_{11} + 1)(N_{01}^2 + N_{02}^2)(\mu\mu_0 u_0(u_0 - u_i) - d_i u_i + 1)n_0^2 + N_{01}((N_{11} + 1)^2 + N_{12}^2)p_i^2]n_0^2 p_i^2; \\
a_{30} &= ((N_{11} + 1)^2 + N_{12}^2)(N_{01}^2 + N_{02}^2)n_0^4 p_i^4.
\end{aligned}$$

The values of the integral (5) are as follows:

$$\sigma_{W_0}^2 = \frac{\pi R_*}{t_5} \frac{\begin{vmatrix} a_{35} & a_{34} & a_{33} & a_{32} & a_{31} & a_{30} \\ -t_6 & t_4 & -t_2 & t_0 & 0 & 0 \\ 0 & -t_5 & t_3 & -t_1 & 0 & 0 \\ 0 & t_6 & -t_4 & t_2 & -t_0 & 0 \\ 0 & 0 & t_5 & -t_3 & t_1 & 0 \\ 0 & 0 & -t_6 & t_4 & -t_2 & t_0 \end{vmatrix}}{\begin{vmatrix} t_5 & -t_3 & t_1 & 0 & 0 & 0 \\ -t_6 & t_4 & -t_2 & t_0 & 0 & 0 \\ 0 & -t_5 & t_3 & -t_1 & 0 & 0 \\ 0 & t_6 & -t_4 & t_2 & -t_0 & 0 \\ 0 & 0 & t_5 & -t_3 & t_1 & 0 \\ 0 & 0 & -t_6 & t_4 & -t_2 & t_0 \end{vmatrix}}, \quad (6)$$

$$\text{where } R_* = \frac{D_{W_0}\alpha\omega_3^3}{\pi}; t_6 = 1; t_5 = \alpha\omega_3 + \delta_0; t_4 = \alpha\omega_3 \delta_0 + \omega_3^2 + \delta_1; t_3 = \omega_3^2 \delta_0 + \alpha\omega_3 \delta_1 + \delta_2;$$

$$t_2 = \omega_3^2 \delta_1 + \alpha\omega_3 \delta_2 + \delta_3; t_1 = \omega_3^2 \delta_2 + \alpha\omega_3 \delta_3; t_0 = \omega_3^2 \delta_3;$$

$$\delta_3 = p_i^2 n_0^2 [(N_{11} + 1)N_{01} - N_{02}N_{12}]^2 + ((N_{11} + 1)N_{02} + N_{01}N_{12})^2]^{\frac{1}{2}};$$

$$\delta_0^2 - 2\delta_1 = \Delta_0;$$

$$\delta_1^2 - 2\delta_0\delta_2 + 2\delta_3 = \Delta_1;$$

$$\delta_2^2 - 2\delta_1\delta_3 = \Delta_2,$$

$$\Delta_0 = -2(p_i^2(1 + N_{11}) + (1 + \mu\mu_0 u_{i0}^2)n_0^2 N_{01});$$

$$\Delta_1 = 2p_i^2 n_0^2 ((1 + N_{11})N_{01} - N_{12}N_{02}) + ((1 + \mu\mu_0 u_{i0}^2)n_0^2 N_{01} + p_i^2(1 + N_{11}))^2 + ((1 + \mu\mu_0 u_{i0}^2)n_0^2 N_{02} + p_i^2 N_{12})^2;$$

$$\Delta_2 = -2n_0^2 p_i^2 [(N_{01}^2 + N_{02}^2)(1 + N_{11})(1 + \mu\mu_0 u_{i0}^2)n_0^2 + N_{01}p_i^2((1 + N_{11})^2 + N_{12}^2)].$$

We calculate the integral representing the root mean square displacements of a beam with a variable cross-section and elastic dissipative characteristics of the hysteresis type, and after some simplifications we write

$$\sigma_{q_i}^2 = \frac{1}{b_1 b_2 p_i^3} \frac{d_i^2 D_{W_0}(-b_1 \alpha^2 p_i \omega_3^2 - \alpha(b_1^2 \omega_3 p_i^2 + \omega_3^3) - b_1 b_2 p_i^3)}{b_2^2 p_i^4 + \alpha b_1 b_2 \omega_3 p_i^3 + (\alpha^2 b_2 - 2b_2 + b_1^2) p_i^2 \omega_3^2 + \alpha b_1 p_i \omega_3^3 + \omega_3^4}, \quad (8)$$

where

$$\begin{aligned}
b_1 &= [2(b_2 - 1 + N_{10i})]^{\frac{1}{2}}; \\
b_2 &= [(1 - N_{10i})^2 + (N_{20i})^2]^{\frac{1}{2}}; \\
N_{10i} &= \gamma_1 K_0 + \frac{1}{p_i^2} \left[ \gamma_1 \frac{3E}{\rho F d_{2i}} \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^k(k+3)} \int_0^l I(x) u_i \frac{\partial^2}{\partial x^2} \left( \frac{\partial^2 u_i}{\partial x^2} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right) dx - \right. \\
&- \frac{E}{\rho F d_{2i}} \int_0^l \frac{\partial^2 I(x)}{\partial x^2} u_i \frac{\partial^2 u_i}{\partial x^2} \left[ 1 - \gamma_1 K_0 - 3\gamma_1 \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^k(k+3)} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right] dx - \frac{2E}{\rho F d_{2i}} \times \\
&\times \left. \int_0^l \frac{\partial I(x)}{\partial x} u_i \frac{\partial}{\partial x} \left[ \frac{\partial^2 u_i}{\partial x^2} \left( 1 - \gamma_1 K_0 - 3\gamma_1 \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^k(k+3)} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right) \right] dx; \right. \\
N_{20i} &= \gamma_2 K_0 + \frac{1}{p_i^2} \left[ \frac{3E}{\rho F d_{2i}} \gamma_2 \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^k(k+3)} \int_0^l I(x) u_i \frac{\partial^2}{\partial x^2} \left( \frac{\partial^2 u_i}{\partial x^2} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right) dx + \right. \\
&+ \left. \frac{E}{\rho F d_{2i}} \int_0^l \frac{\partial^2 I(x)}{\partial x^2} u_i \frac{\partial^2 u_i}{\partial x^2} \left[ \gamma_2 K_0 + 3\gamma_2 \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^k(k+3)} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right] dx + \frac{2E}{\rho F d_{2i}} \times \right.
\end{aligned}$$

$$\times \int_0^l \frac{\partial I(x)}{\partial x} u_i \frac{\partial}{\partial x} \left[ \frac{\partial^2 u_i}{\partial x^2} \left( \gamma_2 K_0 + 3\gamma_2 \sum_{k=1}^n K_k \sigma_{ia}^k \frac{h^k}{2^k(k+3)} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^k \right) \right] dx;$$

The expression of the mean square values (8) makes it possible to determine and analyze the dynamics and stability of the beam's vibrations under the influence of random excitations at different values of the parameters.

## RESULTS AND DISCUSSION

The beam material was 40X grade steel ( $E = 2.08 \cdot 10^{11} \frac{N}{m^2}$ ;  $\rho = 7810 \frac{kg}{m^3}$ ), and for the boundary value problem, a beam with one end clamped and the other end free was considered.

We numerically analyze the vibrations of a beam with one end fixed and one end free. The parameters are taken as follows:  $l = 0.25$ ;  $\gamma_1 = \frac{3}{4}$ ;  $\gamma_2 = \frac{1}{\pi}$ ;  $h = 2 \cdot 10^{-3}$ ;  $K_0 = H_0 = 0$ ;  $K_1 = 6.760624$ ;  $K_2 = -8278.5937$ ;  $K_3 = 5894761$ ;


For the case where the cross section is variable:

$$\begin{aligned} d_{11} &= 195.6830992; d_{21} = 1.984833412 \cdot 10^{10}; \mu = 0.5; \mu_0 = 1.259551550 \cdot 10^{-11}; \\ d_1 &= 9.858918034 \cdot 10^{-9}; I_{11} = 1.941963501 \cdot 10^{-11} m^4; m_1 = \mu \rho S_l h = 0.2335032198 kg; \\ N_{11} &= 0.2160785846 \cdot 10^{-5} - 0.3059812236 \cdot 10^{-2} \sigma_{ia} + 269.8256554 \sigma_{ia}^2 - 1.471908755 \cdot 10^7 \sigma_{ia}^3; \\ N_{12} &= 0.32892743 \cdot 10^{-5} + 0.1311697993 \cdot 10^{-2} \sigma_{ia} - 117.8134994 \sigma_{ia}^2 + 6.67251608 \cdot 10^6 \sigma_{ia}^3. \end{aligned}$$

For the case where the cross section is unchanged:


$$\begin{aligned} N_{11} &= -0.1988432491 \cdot 10^{-2} \sigma_{ia} + 174.097791 \sigma_{ia}^2 - 9.648472811 \cdot 10^6 \sigma_{ia}^3; \\ N_{12} &= 0.84391696 \cdot 10^{-3} \sigma_{ia} - 73.88939738 \sigma_{ia}^2 + 4.094939045 \cdot 10^6 \sigma_{ia}^3. \end{aligned}$$

In order to analyze the deviation of the resonance curves from the vertical, we draw graphs of the  $N_{11}$  function in cases where the cross-section of the beam is variable and constant.

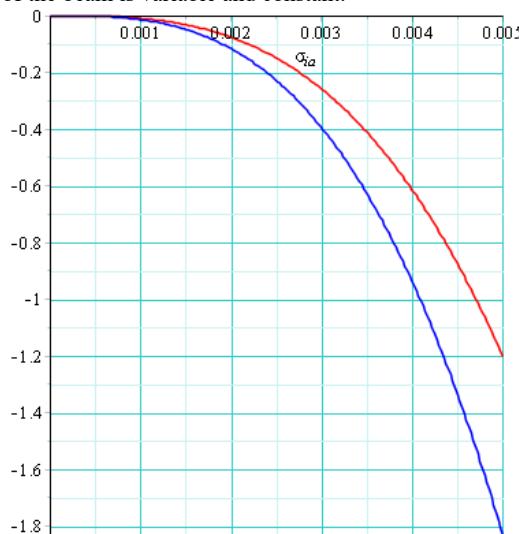


**Figure 1.** Graphs of the deviation of the resonance curve from the vertical in cases where the cross-section of the beam is variable (blue) and constant (red)

Figure 1 shows the graphs of the deviation of the resonance curve from the vertical in the cases where the cross-sectional width of the beam is variable (blue) according to the law  $b = 0.02 + 0.01 \sin(80x)$  and  $b = 0.02$  is constant (red). From this it can be said that the deviation of the resonance curve from the vertical is less when the cross-sectional width of the beam is variable than when it is constant.

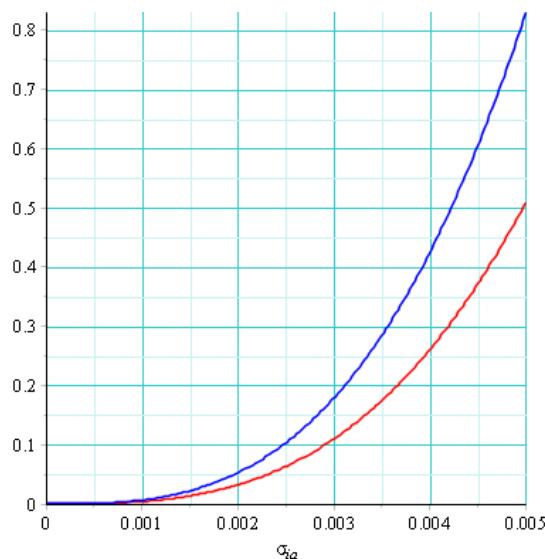

**Figure 2.** Energy distribution graphs for variable (blue) and constant (red) cross-sections of the beam

Figure 2 shows the energy dissipation graphs for the cases where the cross-sectional width of the beam varies according to the law  $b=0.02+0.01 \sin(80x)$  (blue) and  $b=0.02$  is constant (red). From this it can be said that the energy dissipation is greater when the cross-sectional width of the beam varies than when it is constant.

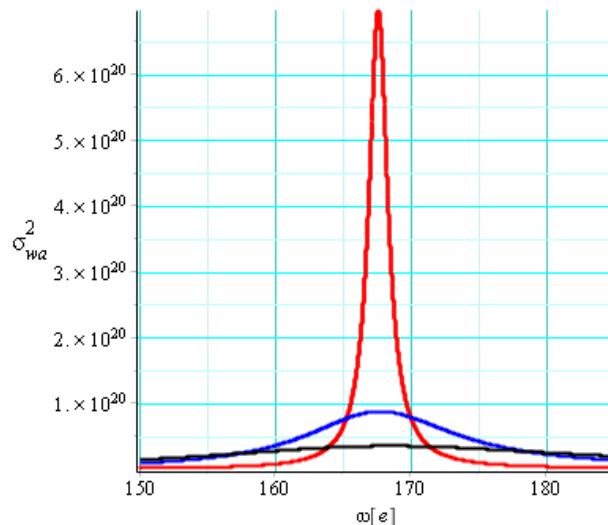


**Figure 3.** (6) Graphs of root mean square absolute accelerations  
( $\alpha = 0.01$  (red);  $0.08$  (blue);  $0.1$  (black).)

Figure 3 shows graphs of the change in the mean square values of the absolute accelerations of the beam (6) depending on the frequency at which the vibration probability is high at the values of the parameter  $\alpha$  ( $\alpha = 0.01$  (red);  $0.08$  (blue);  $0.1$  (black)). From these graphs, it can be seen that with an increase in the parameter characterizing the spectrum width, the root mean square values of the absolute accelerations of the beam, which vary according to the law  $b = 0.02 + 0.01 \sin(80x)$  decrease.

In order to analyze the dynamics of vibrations of a cross-section with elastic dissipative characteristics of the hysteresis type with a width of  $b = 0.02 + 0.01 \sin(80x)$  and a constant width of  $b = 0.02$  under the influence of

random excitations, we analyze the change in the graphs of the expression of the mean square values (8) depending on the frequency at which the vibration probability is high.

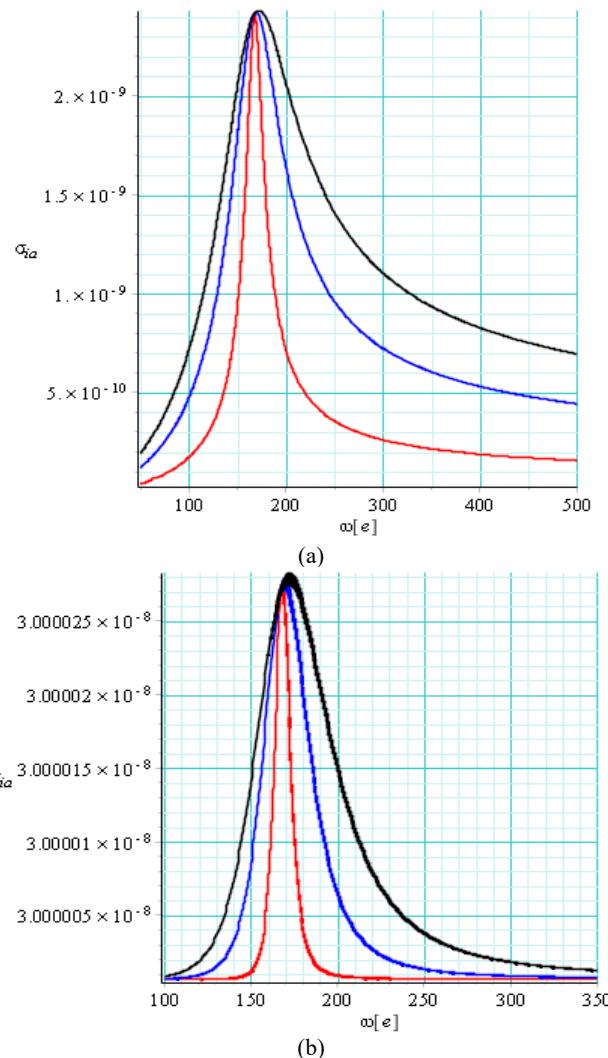

**Figure 4.** Changing the mean square values (8)  
 $\alpha = 0.01$  (red);  $0.08$  (blue);  $0.1$  (black).

In the graphs in Fig. 4-a), the graphs of the expression of the mean square value (8) are presented for the cases where the cross-sectional width of the beam varies according to the law  $b = 0.02 + 0.01 \sin(80x)$  and in Fig. 4-b)  $b = 0.02$  is constant. From the graphs presented for both cases, it can be said that the mean square values of the beam with a variable cross-section are almost ten times smaller than in the case where the cross-section is constant. In addition, in both cases, an increase in the parameter  $\alpha$ , which characterizes the width of the vibration spectrum, does not change the mean square value around the resonant frequency, but at a sufficient distance from the resonant frequency leads to an increase in the mean square value.

## CONCLUSION

The expressions of the mean square values of the displacements and base accelerations of a beam with a hysteresis-type elastic dissipative characteristic with a variable cross-section were numerically analyzed. The changes in the mean square values of the displacements and base accelerations at different values of the parameters were shown on the basis of graphs, and the corresponding conclusions were drawn. It was shown that the deviation of the resonance curve from the vertical was less in the case of a beam with a hysteresis-type elastic dissipative characteristic with a variable cross-section than in the case of a fixed one. It was shown that the energy dissipation was greater in the case of a beam with a hysteresis-type elastic dissipative characteristic with a variable cross-section than in the case of a fixed one. The nonlinear vibrations of a hysteresis-type dissipative beam with a variable cross-section under the influence of random excitations were mathematically modeled and their mean square values were determined analytically for the general case depending on the system parameters. The expressions of the root mean square values of the displacements of a hysteresis-type dissipative beam with a variable cross-section were numerically analyzed. The changes in the root mean square values of the displacements at different values of the parameters were shown on the basis of graphs and the corresponding conclusions were drawn.

## REFERENCES

1. A. N. Zotov, A. P. Tokarev, A Dynamic Vibration Absorber with Adjustable Stiffness mechanics of machines Volume **52**, pp. 525–531, (2023).
2. Y.Cheng, D. Li., Ch. Li, Dynamic vibration absorbers for vibration control within a frequency band Contents lists available at Science Direct journal homepage: [www.elsevier.com/locate/jsvi](http://www.elsevier.com/locate/jsvi) 0022-460X/\$ - see front matter & (2010) Elsevier Ltd. All rights reserved. doi:10.1016/j.jsvi.2010.10.018.
3. O. Drachev, I. Turbin, I. Amirdzhanova, T. Varentsova, V. Petrova, Togliatti State University, Togliatti, Russian Federation Dynamic vibration absorber for shaft machining MATEC Web of Conferences 329, 03045 (2020). <https://doi.org/10.1051/matecconf/202032903045>.
4. A. T. Zhakash, E. A. Dzhakashova, O. M. Tursynbay, Numerical methods for calculating vibrations of straight beams of variable cross-section International Scientific Journal Theoretical & Applied Science, (2019). <http://T-Science.org>.
5. N. Zh. Kinash, V. B. Kashuba, D. H. Nguyen, Dynamic Damping Modes in Systems with Several Degrees of Freedom Systems. Methods. Technologies. N.Zh. Kinash et al. Dynamic Damping Modes, No. **1**(33) pp. 19-28 19 UDC 62.752, 621:534.833; 888.6, (2017) DOI: 10.18324/2077-5415-2017-1-19-28.
6. T. M. Mahesha, K. Ranjith, Experimental Inverstigation of Transverse Vibration Characteristics of Beams. International Journal for Research in Applied Science & Engineering Technology (IJRASET). Volume **7**, pp.265-273, (2019).
7. H. Yingyu, W. Waion, Ch. Li, Optimal design of a beam-based dynamic vibration absorber using fixed-points theory. Journal of Sound and Vibration. Volume **421**, pp. 111-131, (2018).
8. Y. V. Nemirovsky, A. V. Mishchenko, R. F. Terletskii, Dynamic analysis of composite beams with variable cross-section Computational Continuum Mechanics@journal-icmm. 2 v.8, 2015. Journal of Mathematical Sciences, Vol. **223**, No. 1, (2017).
9. J. Kisilowski, R. Kowalik, Numerical Testing of Switch Point Dynamics-A Curved Beam with a Variable Cross-Section Materials (Basel), **13**(3), 701, (2020). doi: 10.3390/ma13030701.
10. M. A. Pavlovsky, L. M. Ryzhkov, V. B. Yakovenko, O. M. Dusmatov, Nonlinear problems of the dynamics of vibration protection systems. - K.: Tekhnika, - p. 204. (1997).
11. A. Szekre'nyes, Natural vibration-induced parametric excitation in delaminated Kirchhoff plates. Journal of Composite Materials, Volume **50**(17), p.2337–2364, (2016).
12. L. A. Baragunova, M. M. Shogenova, O. M. Shogenov, E. A. Yafaunov, Free vibrations of variablesection beams taking rotational and frictional forces into account Bulletin of Science and Research Center of Construction, (40)-7-20. <https://doi.org/10.37538/2224-9494-2024-1>
13. V. P. Pavlov, L. R. Nusratullina, E.M. Nusratullin, Refining the results of numerical calculations of the frequencies of transverse vibrations of a beam of variable cross-section with elastic fixation by extrapolation method UGATU Bulletin, Vol. **27**, No. 3 (101), pp. 29–37 (2023). <http://journal.ugatu.su>
14. G. A. Bogdanova, Z. V. Ivanova, Application of dynamic vibration absorbers to increase the stability of communication tower structures to wind effects. Bulletin of the St. Petersburg State Transport University, Vol. **20**, No. 3, (2023).

15. L. Hans, B. Viktor, J. Mattias, S.L. Grétarsson, Nonlinear dynamic absorber to reduce vibration in hand-held impact machines International Conference on Engineering Vibration Ljubljana, Slovenia, 7-10 September (2015).
16. O. Drachev, I. Turbin, I. Amirdzhanova, T. Varentsova, V. Petrova, Togliatti State University, Togliatti, Russian Federation Dynamic vibration absorber for shaft machining MATEC Web of Conferences 329, 03045 (2020) <https://doi.org/10.1051/matecconf/202032903045>.
17. Mirsaidov M. M., Dusmatov O .M., Khodjabekov M. U. The problem of mathematical modeling of a vibration protected beam under kinematic excitations. IOP Conf. Series: Materials Science and Engineering, 1030 (2021) 012069, <https://doi:10.1088/1757-899X/1030/1/012069>
18. M. M. Mirsaidov, O. M. Dusmatov, M. U. Khodjabekov, Mode Shapes of Transverse Vibrations of Beams Protected from Vibrations in Kinematic Excitations. Lecture Notes in Civil Engineering 170, pp. 217-227, (2021). [https://doi.org/10.1007/978-3-030-79983-0\\_20](https://doi.org/10.1007/978-3-030-79983-0_20)
19. M. M. Mirsaidov, O. M. Dusmatov, M. U. Khodjabekov, Stability of nonlinear vibrations of plate protected from vibrations. Journal of Physics: Conference Series, 1921 (2021) 012097, <https://doi:10.1088/1742-6596/1921/1/012097>
20. M. M. Mirsaidov, O. M. Dusmatov, M. U. Khodjabekov, Mode Shapes of Hysteresis Type Elastic Dissipative Characteristic Plate Protected from Vibrations. Lecture Notes in Civil Engineering 282, pp. 127-140, (2022). [https://doi.org/10.1007/978-3-031-10853-2\\_12](https://doi.org/10.1007/978-3-031-10853-2_12)
21. O. M. Dusmatov, M. U. Khodjabekov, F. U. Kasimova, Dynamics of a beam with variable cross-section protected from vibration. Web of Conferences 549, 00001 (2024), <https://doi.org/10.1051/e3sconf/202454900001>.
22. O. M. Dusmatov, F.U. Kasimova, The problem of damping nonlinear transverse vibrations of an elastic beam under random excitations. "SamDU Scientific Information" scientific journal No. 3, (2025).



## LICENSE TERMS DEFINED

**Accepted Manuscript (AM):** The final version of an author's manuscript that has been accepted for publication and incorporates all the editorial changes made to the manuscript after submission and peer review. The AM does not yet reflect any of the publisher's enhancements to the work such as copyediting, pagination, and other standard formatting.

**arXiv:** An electronic archive and distribution server for research article preprints in the fields of physics, mathematics, computer science, quantitative biology, quantitative finance, and statistics, which is owned and operated by Cornell University, <http://arxiv.org/>.

**Commercial and noncommercial scholarly use:** *Noncommercial* scholarly uses are those that further the research process for authors and researchers on an individual basis for their own personal purposes. They are author-to-author interactions meant for the exchange of ideas. *Commercial* uses fall outside the author-to-author exchange and include but are not limited to the copying or distribution of an article, either in hard copy form or electronically, for resale or licensing to a third party; posting of the AM or VOR of an article by a site or service where an access fee is charged or which is supported by commercial paid advertising or sponsorship; use by a for-profit entity for any type of promotional purpose. Commercial uses require the permission of AIP Publishing.

**Embargo period:** The period of time during which free access to the full text of an article is delayed.

**Employer's web page:** A web page on an employer's site that highlights the accomplishments and research interests of the company's employees, which usually includes their publications. (See also: Personal web page and Scholarly Collaboration Network).

**Exclusive License to Publish:** An exclusive license to publish is a written agreement in which the copyright owner gives the publisher exclusivity over certain inherent rights associated with the copyright in the work. Those rights include the right to reproduce the work, to distribute copies of the work, to perform and display the work publicly, and to authorize others to do the same. The publisher does not hold the copyright to the work, which continues to reside with the author. The terms of the AIP Publishing License to Publish encourage authors to make full use of their work and help them to comply with requirements imposed by employers, institutions, and funders.

**Full Credit Line:** AIP Publishing's preferred format for a credit line is as follows (you will need to insert the specific citation information in place of the capital letters): "Reproduced from [FULL CITATION], with the permission of AIP Publishing." A FULL CITATION would appear as: Journal abbreviation, volume number, article ID number or page number (year). For example: Appl. Phys. Lett. 107, 021102 (2015).

**Institutional repository:** A university or research institution's digital collection of articles that have been authored by its staff and which are usually made publicly accessible. As authors are encouraged and sometimes required to include their published articles in their institution's repository, the majority of publishers allow for deposit of the Accepted Manuscript for this purpose. AIP Publishing also allows for the VOR to be deposited 12 months after publication of the Work.

**Journal editorial office:** The contact point for authors concerning matters related to the publication of their manuscripts. Contact information for the journal editorial offices may be found on the journal websites under the "About" tab.

**Linking to the Version of Record (VOR):** To create a link to your article in an AIP Publishing journal or proceedings, you need to know the CrossRef digital object identifier (doi). You can find the doi on the article's abstract page. For instructions on linking, please refer to our Web Posting Guidelines at <https://publishing.aip.org/authors/web-posting-guidelines>.

**National Laboratories:** National laboratories are sponsored and funded by the U.S. Government but have independent nonprofit affiliations and employ private sector resources. These institutions are classified as Federally Funded Research and Development Centers (FFRDCs). Authors working at FFRDCs are not

considered U.S. Government employees for the purposes of copyright. The Master Government List of FFRDCs may be found at <http://www.nsf.gov/statistics/ffrdclist/>.

**Personal web page:** A web page that is hosted by the author or the author's institution and is dedicated to the author's personal research interests and publication history. An author's profile page on a social media site or scholarly collaboration network site is *not* considered a personal web page. (See also: Scholarly Collaboration Network; Employer's web page).

**Peer X-Press:** A web-based manuscript submission system by which authors submit their manuscripts to AIP Publishing for publication, communicate with the editorial offices, and track the status of their submissions. The Peer X-Press system provides a fully electronic means of completing the License to Publish. A hard copy of the Agreement will be supplied by the editorial office if the author is unable to complete the electronic version of the form. (Conference Proceedings authors will continue to submit their manuscripts and forms directly to the Conference Editors.)

**Preprint:** A version of an author's manuscript intended for publication but that has not been peer reviewed and does not reflect any editorial input or publisher enhancements.

**Professional Publication Ethics:** AIP Publishing provides information on what it expects from authors in its "Statement of ethics and responsibilities of authors submitting to AIP Publishing journals" (<http://publishing.aip.org/authors/ethics>). AIP Publishing is also a member of the Committee on Publication Ethics (COPE) (<http://publicationethics.org/>), which provides numerous resources and guidelines for authors, editors, and publishers with regard to ethical standards and accepted practices in scientific publishing.

**Scholarly Collaboration Network (SCN):** Professional networking sites that facilitate collaboration among researchers as well as the sharing of data, results, and publications. SCNs include sites such as Academia.edu, ResearchGate, and Mendeley, among others.

**Supplementary Material:** Related material that has been judged by peer review as being relevant to the understanding of the article but that may be too lengthy or of too limited interest for inclusion in the article itself. Supplementary Material may include data tables or sets, appendixes, movie or audio clips, or other multimedia files.

**U.S. Government employees:** Authors working at Government organizations who author works as part of their official duties and who are not able to license rights to the Work, since no copyright exists. Government works are in the public domain within the United States.

**Version of Record (VOR):** The final published version of the article as it appears in the printed journal/proceedings or on the Scitation website. It incorporates all editorial input, is formatted in the publisher's standard style, and is usually viewed in PDF form.

**Waiver:** A request made to a university or institution to exempt an article from its open-access policy requirements. For example, a conflict will exist with any policy that requires the author to grant a nonexclusive license to the university or institution that enables it to license the Work to others. In all such cases, the Author must obtain a waiver, which shall be included in the manuscript file.

**Work:** The "Work" is considered all the material that comprises the article, including but not limited to the abstract, tables, figures, images, multimedia files that are directly embedded within the text, and the text itself. The Work does not include the Supplementary Material (see Supplementary Material above).

**Work Made for Hire:** Under copyright law, a work prepared by an employee within the scope of employment, or a work that has been specially ordered or commissioned for which the parties have agreed in writing to consider as a Work Made for Hire. The hiring party or employer is considered the author and owner of the copyright, not the person who creates the work.